

### **Main Features:**

- 2 Persons Submarine
- Depth rating :600 meters
- Streamlined for higher speed
- Mobil Hull for higher manoeuvrability
- Shallow water lockout submarine

### **Specification:**

- Weight in air : 2.5 Tonnes
- Payload: 200 kg
- Life support : 300 man hours
- Max speed: 4 knots

### **Pressure Hull:**

- Cylindrical and conical in shape
- Carbon steel P275N11 with Flange in 316L
- Ta6V in option


### **Viewport:**

- Single 1200mmOD hemispherique Window

### **Power source:**

- Two Pressure resistant battery pods
- Emergency power provided in cabin

## **PS6000 RESCUER– COMMAND MODUL Deep Multipurpose Submarine**

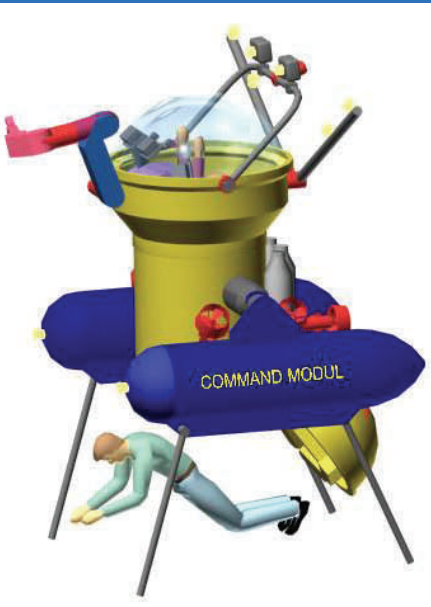

### **Control:**

- Pods/cabin Angle from +/-90
- Six thrusters (4 in vertran position)
- Hard ballast releasable
- Trim tank inside the cabin

### **Life Support:**

- 4 O2 cylinders external
- Co2 scrubber

### **Communication:**

- VHF Surface
- SSB Phone with UQS and 27 Khz

### **Equipment in option:**

- Special Tools and equipment as Tracking beacon, xenon strobe, pinger, magnetometer, Excavation pumps, sampling equipment, precision laser, measuring system, pipe tracker, explosive attachment lift bag salvage module, U.W cutting tools, Hydraulic Cutters, Manipulators, IR Camera, HMI Light, Ultra Short or Long base Navigation system, DGPS